## COFFEE DOSING SCALE

# Instruction Manual

### TIMER FUNCTION

- 1. Tap the "4" button to start the timer.
- 2. Press the "O" button once during the timing process to pause the timing. Press the "O" button again to continue the timer.
- 3. Press and hold the "O" button for 2 seconds to set (tare) the timer to zero.

# **ESPRESSO TIMER FUNCTION**

1 This mode is designed for automatically timing espresso shots.



3 The scale will perform auto-tare.

2 Placing a cup or other object onto the scale will start an automatic tare



4 After the scale detects the coffee extraction dripping into the cup, the timer will automatically start






### MAINTENANCE AND REPAIR

- Use a soft cloth (slightly damp if needed) or paper towel to clean. If there are marks on the scale you can use a mild detergent or spray to wipe clean.
- Do not use thinner benzene, gasoline, volatile oil or alcohol to clean this product.

## PANEL DISPLAY INFORMATION

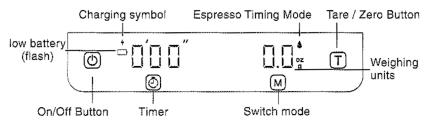

#### **OPERATION INSTRUCTIONS**

- · This is a precision instrument please avoid dropping the scale, which may lead to product failure.
- · Gently place the item to weigh on the scale. If you drop an item on the scale or place it heavily, it may cause failure.
- · Do not store items on top of the scale.
- This product can only be used on a flat horizontal surface.
- Do not touch the edge of the gap with your fingers. This may cause damage.
- Do not place in high temperature areas. It will deteriorate the surface or cause fire. Avoid placing near a hot stove or other heating equipment. Avoid exposure to direct sunlight.
- · Mobile communication equipment may affect the measurement of the electronic scale. Avoid strong electromagnetic interference from items such as mobile phones, microwave ovens, etc. This may cause failure.
- Do not use the product when it is hot or immersed in water, as this may cause the product to malfunction.







### **CHARGING THE SCALE**

• To use the AC adapter instead of the built-in battery, plug the USB cable into the micro-B USB port on the back of the scale.




### **HOW TO USE**

- Tap the "O" button to turn the scale on.
- When an object is placed on the scale it will show the weight of the object. Make sure the scale reads "0.0g" before placing the object on the scale. Put the scale on a flat surface and place the object in the center of the scale.
- If you want to tare the weight, put a container on the scale then gently touch "T" to tare the scale. After the scale shows "0.0g" you can put the goods in the container to weigh. It will then show the net weight of what is inside the
- Press the zero button "T" for 5 seconds to switch g/oz units.
- Press the timer button "O" to start or stop the timer.
- Press and hold the "M" button to switch mode.
- Double tap the "ტ" button to turn the scale off. Press and hold the "O" button for 10 seconds to switch Auto-off function:


no≖oFF 3-oFF (no auto-off function) (auto-off in 3 minutes)

# **CALIBRATION STEPS**

1 Turn on the scale. Make sure it is in weighing mode and unit is set to "gram".



3 Wait until "  $P_{\nu E}$ " is shown on the display then place a 100g weight on the scale (DO NOT place weight on the scale until " Put " is shown)



2 Tap the "T" button rapidly over 6 times until " [-2Ero" is shown on the display.



4 Wait until the display shows " 0,0" then " PR55" displays. Calibration is now complete.



## **SCALE PRECISION RANGE**

This product is manufactured and tested in accordance with the national weighing technical standard and measurement method.

(If use 20 +/-5°C at room temperature)

,
precision
±0.5g
±1g
±2g
±3g

\* Weighing range: 0.3g-2000g