


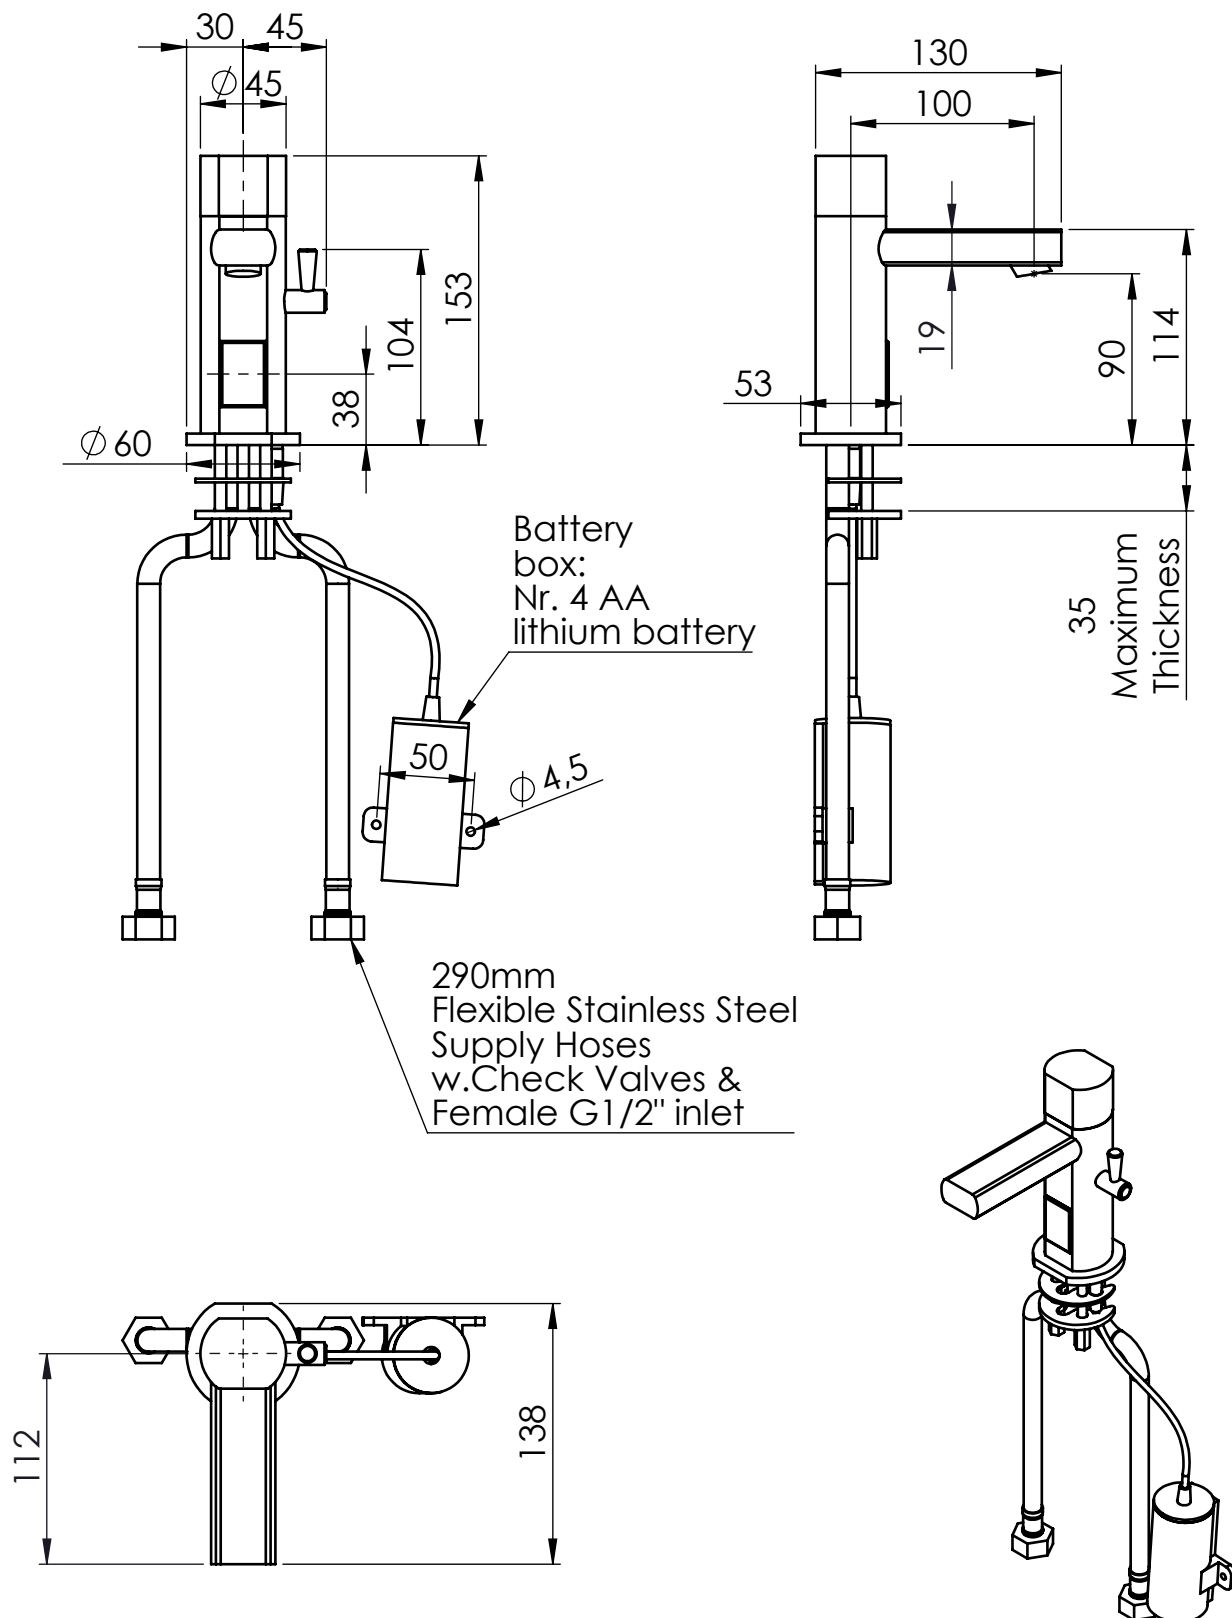

Rough-In Requirement:  
35mm Mounting Hole

#### TITLE / DESCRIZIONE

Single hole, deck mount mixing temperature electronic sensor (battery operated) faucet with manual temperature adjustment and autostop system (15sec). Brass, chrom plated.

#### DRN / DIS

SCALE /  
SCALA 1:4

#### NUMBER / CODICE DIS.

#### CHD / VER

DATE /  
DATA 11/06/2020


#### MODEL / PRODOTTO

1S.2470.00.00B

#### APPR

SHEET /  
PAG 1 of 2

| ITEM NO. | SALES NO. | DESCRIPTION                                                  |
|----------|-----------|--------------------------------------------------------------|
| 1        | P501      | Solenoid Valve BIST 6V BIA                                   |
| 2        | P579      | Battery Box (without Battery) complete with cable and jack   |
| 3        | F202      | L.35cm Flex S.S. Hose Ø12-DN8 Female G1/2" W. BACKFLOW PREV. |
| 4        | P347      | FIXING KIT 2470                                              |
| 5        | P668      | IR SENSOR (BATTERY)                                          |

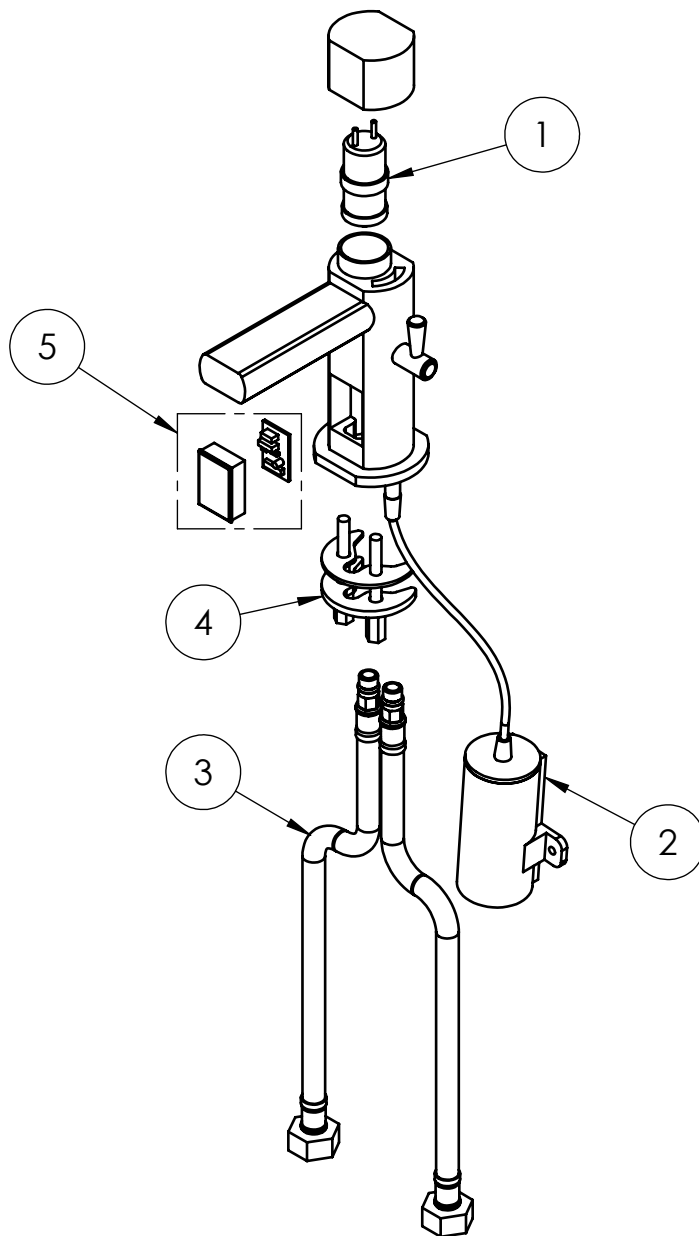

### TITLE / DESCRIZIONE

Single hole, deck mount mixing temperature electronic sensor (battery operated) faucet with manual temperature adjustment and autostop system (15sec). Brass, chrom plated.

DRN / DIS

CHD / VER

APPR

SCALE /  
SCALA 1:4

DATE /  
DATA 11/06/2020

SHEET /  
PAG 2 of 2

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

NUMBER / CODICE DIS.

MODEL / PRODOTTO

1S.2470.00.00B

A4V