


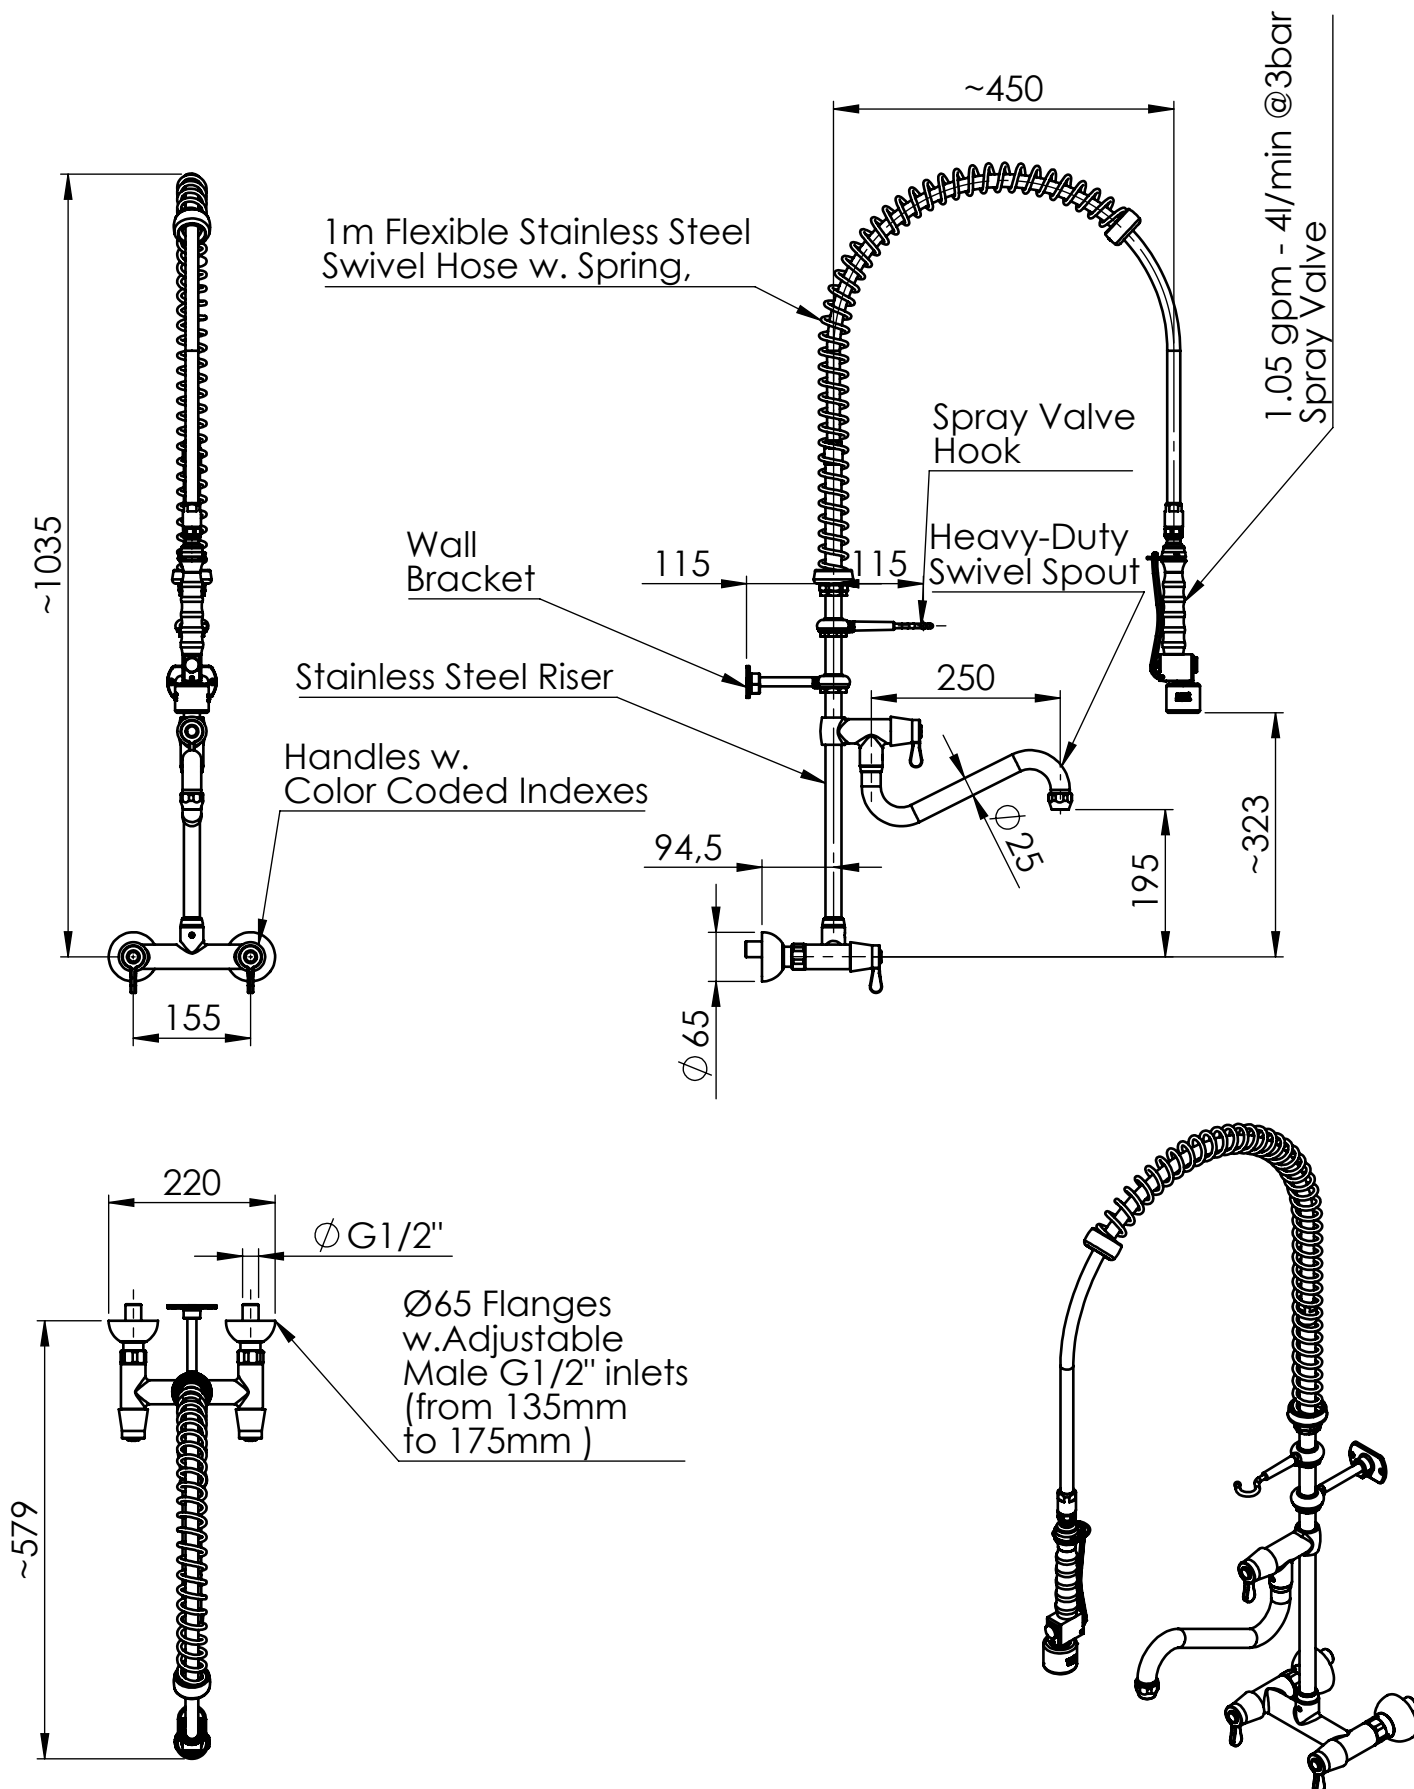

TITLE / DESCRIZIONE

High flow wall mount (135-175mm adjustable center distance) mixing temperature Pre-Rinse Unit with riser add-on faucet with 250mm swivel nozzle (Ø 25mm), G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube – stainless steel, brass, chrome plated. 4L/min KLARCO Low-Flow spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

SCALE /
SCALA

1:10

NUMBER / CODICE DIS.

CHD / VER

DATE /
DATA

16/06/2020

MODEL / PRODOTTO

3E.4051.4L.F9


APPR

SHEET /
PAG

1 of 2

A4V

ITEM NO.		DESCRIPTION
1	P591	SPRAY VALVE "NEW Low-Flow " BLACK
2	P074	FLAT GASKET 1/2" Ø18,5x11 sp.2mm
3	P005	OVERHEAD SPRING "GREY"
4	P004	100cm Ø17 F1/2"xF1/2" FLEXIBLE HOSE
5	P007	SPRING CHROMED SUPPORT
6	P034	115mm WALL BRACKETCHROMED
7	P035	SPRAY VALVE CHROMED SUPPORT
8	P217/F9	650mm G1/2" RISER W.ADD ON TAP,HANLDE, CERAMIC HEADWORK AND O-RING
9	P076	O-RING 2062 (Ø15.6x1.78), EPDM 70 PEROX
10	P107	FLAT GASKET 3/4" Ø24x17sp.2mm
11	P400	G1/2" MALE ECCENTRIC FLANGE w.BACKFLOW PREV.KIT
12	P031	BACKFLOW PREVENTER DW20-DN15
13	V0F0/D	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN - RH)
14	H009/color	"VOX" HANDLE W. COLOR CODED INDEX (specify the color B or R)
15	V0F9/B	COMPLETE HANDLE W.BLUE CODED INDEX +CERAMIC HEADWORK KIT
16	P236	SPOUT SCREW (short)
17	V0F9/R	COMPLETE HANDLE W.RED CODED INDEX +CERAMIC HEADWORK KIT
18	V0F0/S	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN) LEFT
19	P014	STREAM REGULATOR OUTLET (Ø25 SPOUT)
20	C0S3	SWING NOZZLE Ø25x250 h.60
21	P072	O-Ring 119 (Ø 15,08 x 2,62mm) EPDM 70
22	P592	SWIVEL SLEEVE
23	P613	#2 OR+#1 SWIVEL SLEEVE KIT FOR FAUCET/OUTLET

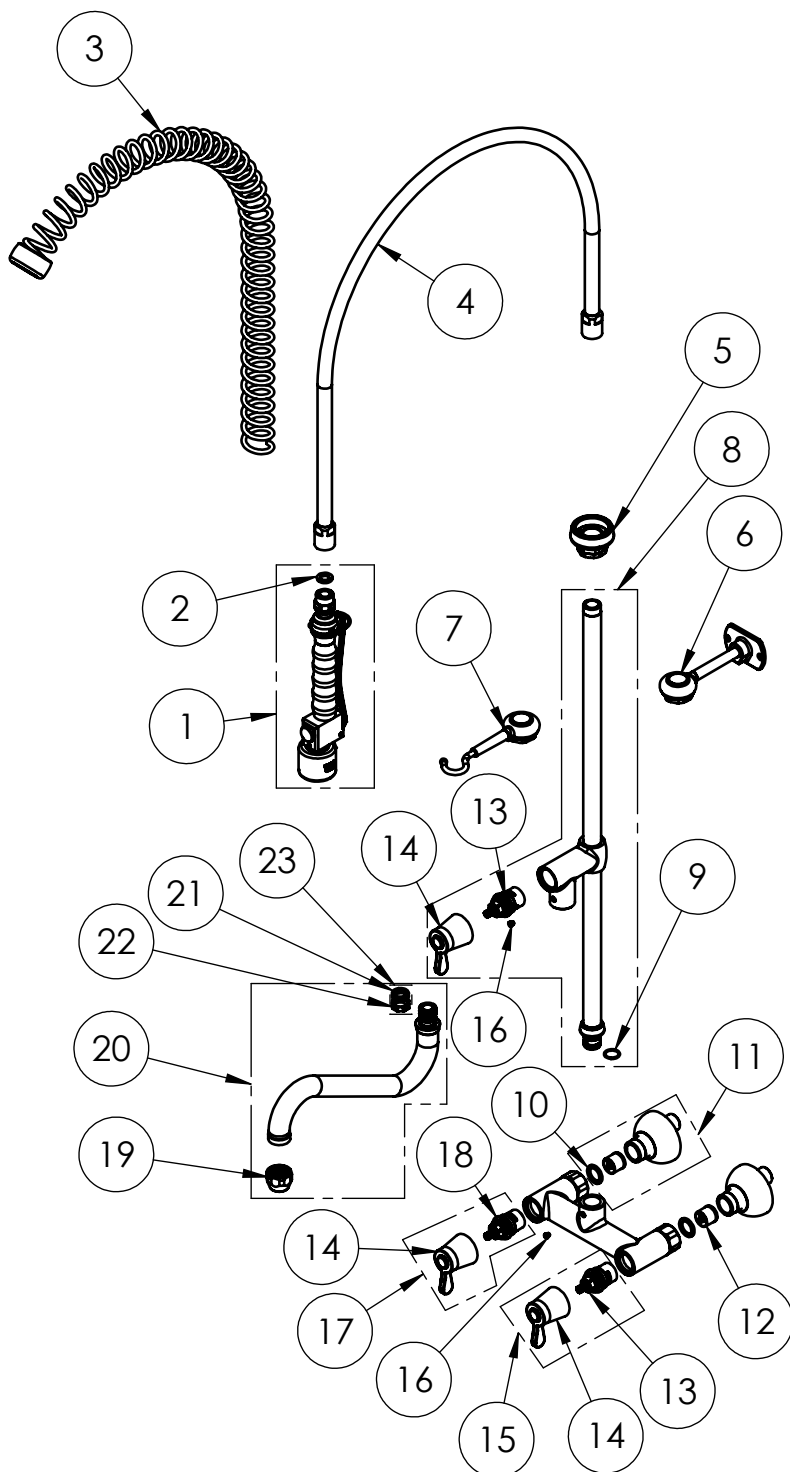

TITLE / DESCRIZIONE

High flow wall mount (135-175mm adjustable center distance) mixing temperature Pre-Rinse Unit with riser add-on faucet with 250mm swivel nozzle (Ø 25mm), G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube – stainless steel, brass, chrome plated. 4L/min KLARCO Low-Flow spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS	CHD / VER	APPR
SCALE / SCALA 1:9	DATE / DATA 16/06/2020	SHEET / PAG 2 of 2
NUMBER / CODICE DIS.	MODEL / PRODOTTO 3E.4051.4L.F9	A4V