


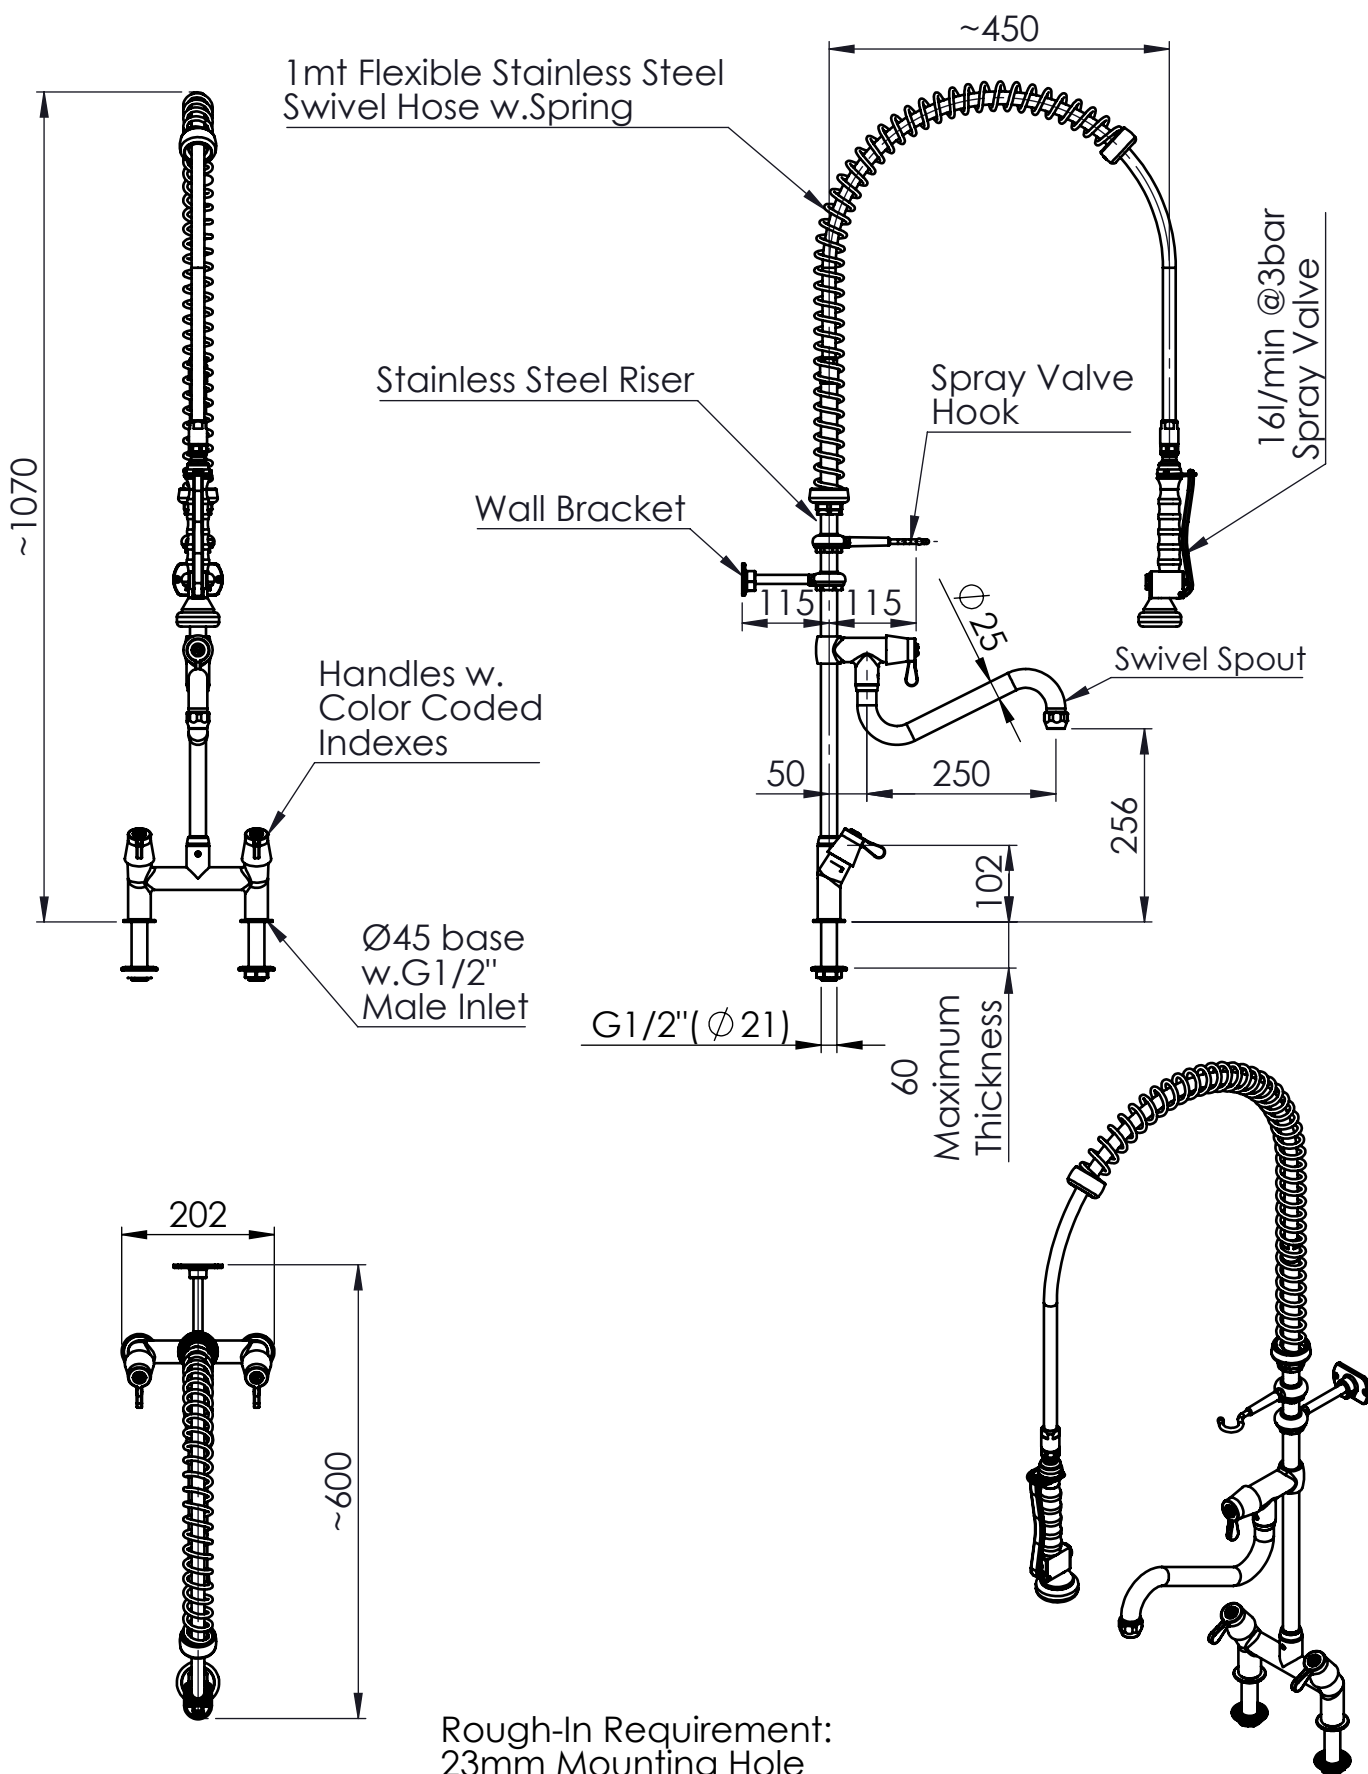

Rough-In Requirement:
23mm Mounting Hole

TITLE / DESCRIZIONE

Double-hole (155mm center distance) slanted, mixing temperature, deck mount Pre-Rinse Unit, riser add-on faucet with 250mm swivel nozzle (Ø25mm) . 80mm-long mounting shanks, G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube -stainless steel,brass,chrome plated.16L/min KLARCO spray valve.

DRN / DIS

SCALE /
SCALA 1:10

CHD / VER

DATE /
DATA 03/03/2020

APPR

SHEET /
PAG 1 of 2

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato


NUMBER / CODICE DIS.

MODEL / PRODOTTO

3E.3014.S3.F9

A4V

ITEM NO.	SALES NO.	DESCRIPTION
1	P020	SPRAY VALVE "NEW " BLACK
2	P074	FLAT GASKET 1/2" Ø18,5x11 sp.2mm
3	P005	OVERHEAD SPRING "GREY"
4	P004	100cm Ø17 F1/2"xF1/2" FLEXIBLE HOSE
5	P007	SPRING CHROMED SUPPORT
6	P217/F9	650mm G1/2" RISER W.ADD ON TAP,HANLDE, CERAMIC HEADWORK AND O-RING
7	P034	115mm WALL BRACKETCHROMED
8	P035	SPRAY VALVE CHROMED SUPPORT
9	P236	SPOUT SCREW (short)
10	V0F0/D	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN - RH)
11	H009/color	MANIGLIA VOX per vitone ceramico
12	P076	O-RING 2062 (Ø15.6x1.78), EPDM 70 PEROX
13	V0F9/B	COMPLETE HANDLE W.BLUE CODED INDEX +CERAMIC HEADWORK KIT
14	P030	BACKFLOW PREVENTER DW15/DN10
15	P072	O-Ring 119 (Ø 15,08 x 2,62mm) EPDM 70
16	P592	SWIVEL SLEEVE
17	P613	#2 OR+#1 SWIVEL SLEEVE KIT FOR FAUCET/OUTLET
18	P014	STREAM REGULATOR OUTLET (Ø25 SPOUT)
19	C0S3	SWING NOZZLE Ø20x250 h.60
20	V0F0/S	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN - LH)
21	V0F9/R	COMPLETE HANDLE W.RED CODED INDEX +CERAMIC HEADWORK KIT

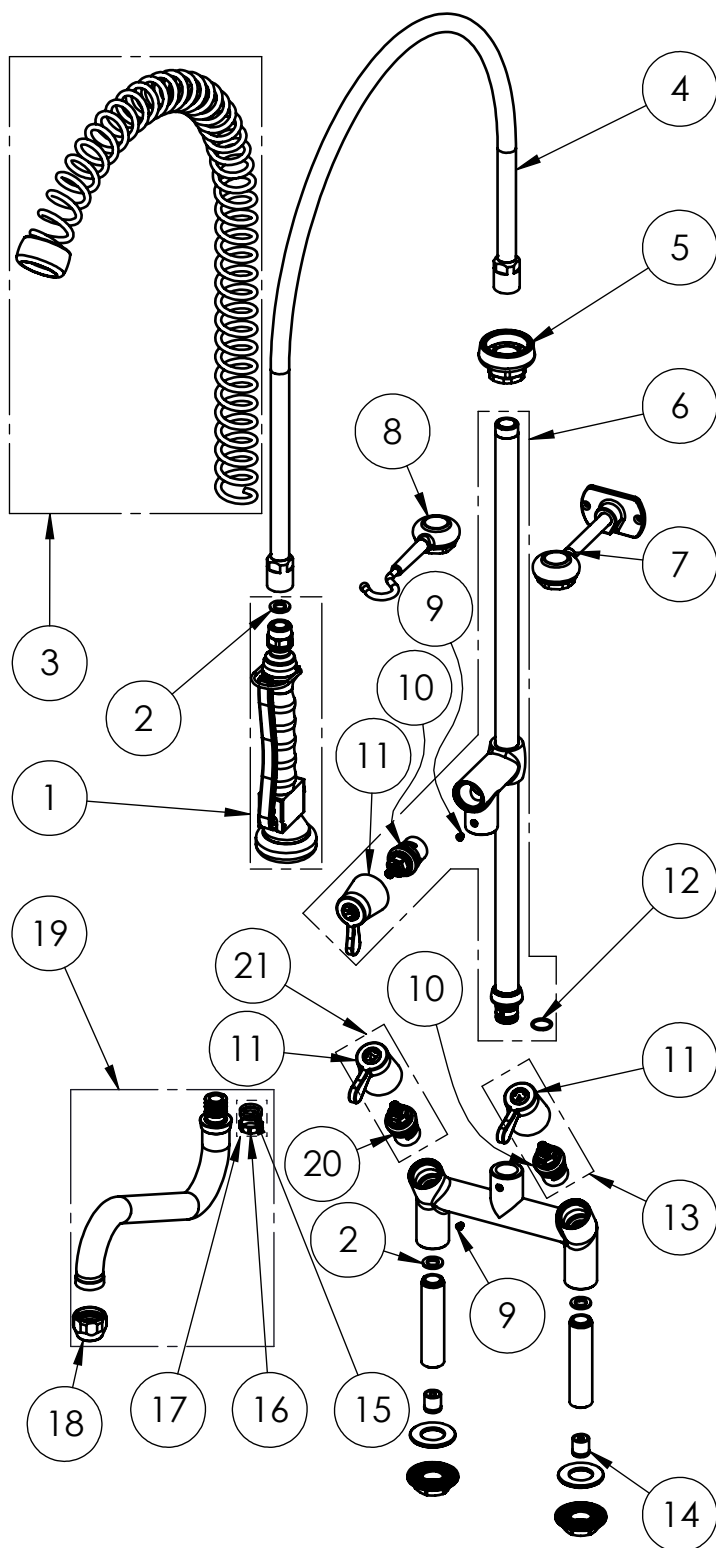

TITLE / DESCRIZIONE

Double-hole (155mm center distance) slanted, mixing temperature, deck mount Pre-Rinse Unit, riser add-on faucet with 250mm swivel nozzle (Ø25mm) . 80mm-long mounting shanks, G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube -stainless steel,brass,chrome plated.16L/min KLARCO spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

SCALE /
SCALA 1:7

NUMBER / CODICE DIS.

CHD / VER

DATE /
DATA

MODEL / PRODOTTO

3E.3014.S3.F9

APPR

SHEET /
PAG 2 of 2

A4V