


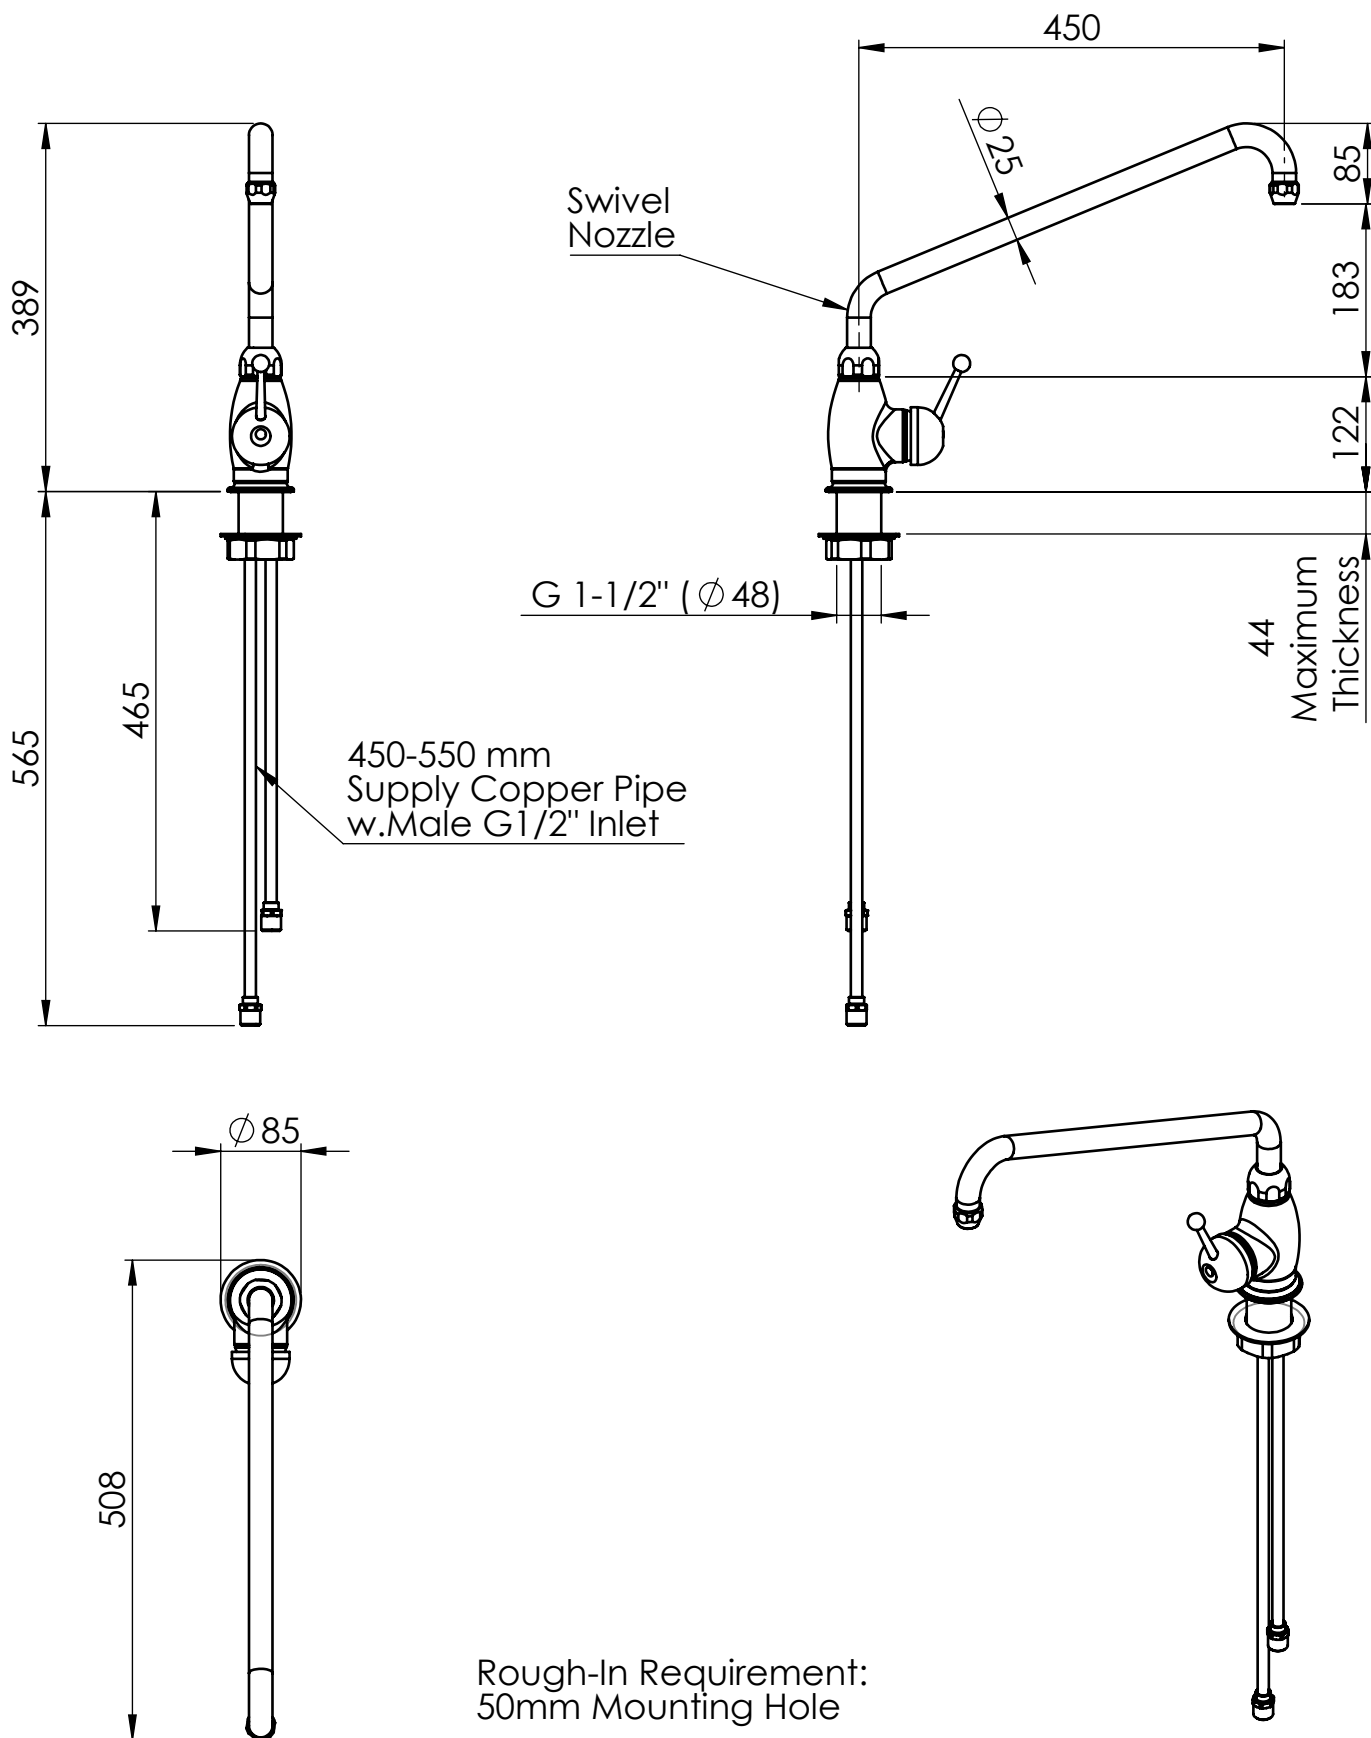

Rough-In Requirement:
50mm Mounting Hole

TITLE / DESCRIZIONE

Extra robust and high flow single hole, deck-mount, single lever (LCA) mixing faucet for pot filling with 450mm, 360° swivel nozzle (Ø 25mm). 80mm-long mounting shank, G1/2" male inlets, high flow ceramic cartridge, brass, chrome plated

DRN / DIS

SCALE /
SCALA 1:8

CHD / VER

DATE /
DATA 04/09/2020

APPR


SHEET /
PAG 1 of 2

NUMBER / CODICE DIS.

MODEL / PRODOTTO
1E.2940.94.79

A4V

ITEM NO.	SALES NO.	DESCRIPTION
1	P014	STREAM REGULATOR OUTLET (Ø25 SPOUT)
2	C094	SWING NOZZLE Ø 25x450h150
3	P614	#2 OR+#2 SWIVEL SLEEVES KIT FOR FAUCET (GIG/LCA)
4	P391	O-RING 28x2 EPDM70
5	P566	GIG/LCA SWIVEL SLEEVE
6	P286	O-RING 11x1.5mm EPDM 70 sh. PEROX
7	P323	COPPER PIPE L.450mm
8	P324	COPPER PIPE L.550mm
9	H019	LCA SHORT LEVER
10	V070	Ø47 MIXING CARTRIDGE

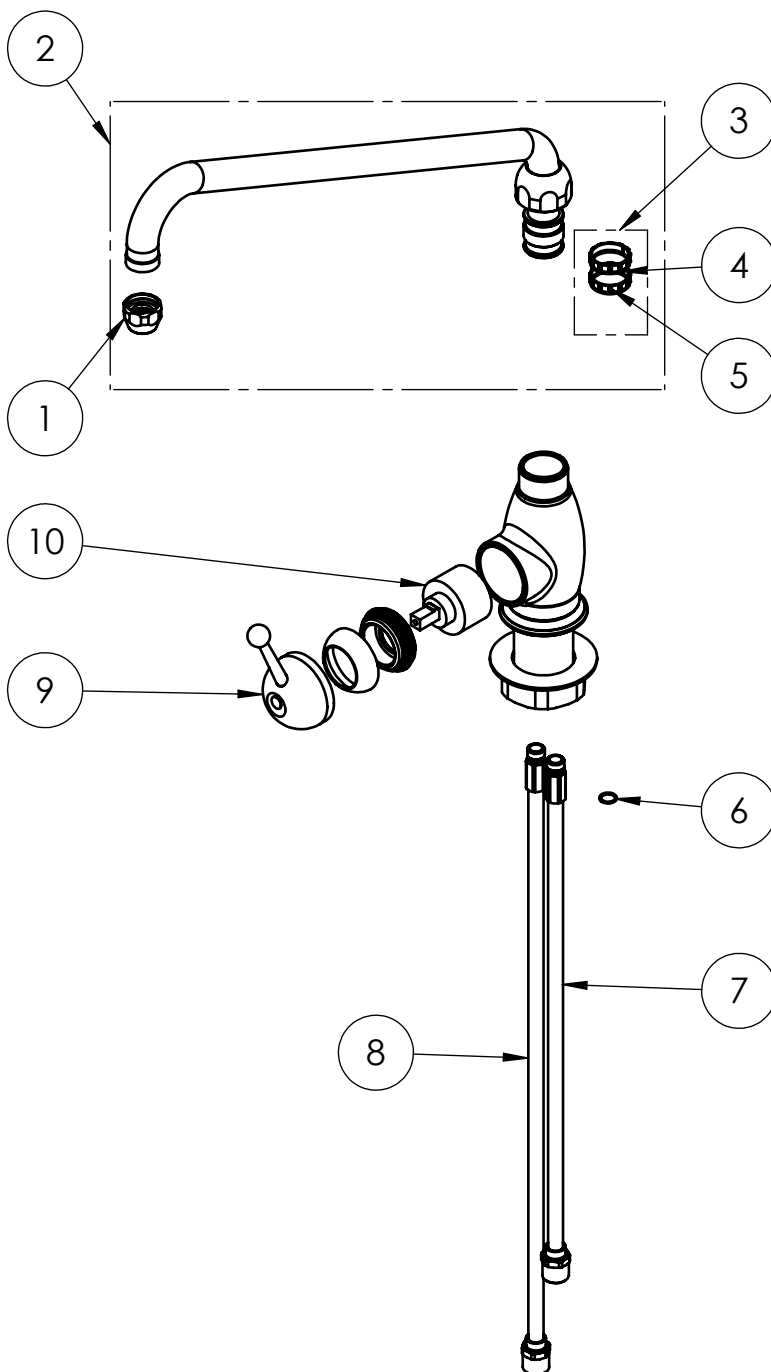

TITLE / DESCRIZIONE

Extra robust and high flow single hole, deck-mount, single lever (LCA) mixing faucet for pot filling with 450mm, 360° swivel nozzle (Ø 25mm). 80mm-long mounting shank, G1/2" male inlets, high flow ceramic cartridge, brass, chrome plated

DRN / DIS

SCALE /
SCALA 1:6

CHD / VER

DATE /
DATA 04/09/2020

APPR

SHEET /
PAG 2 of 2