


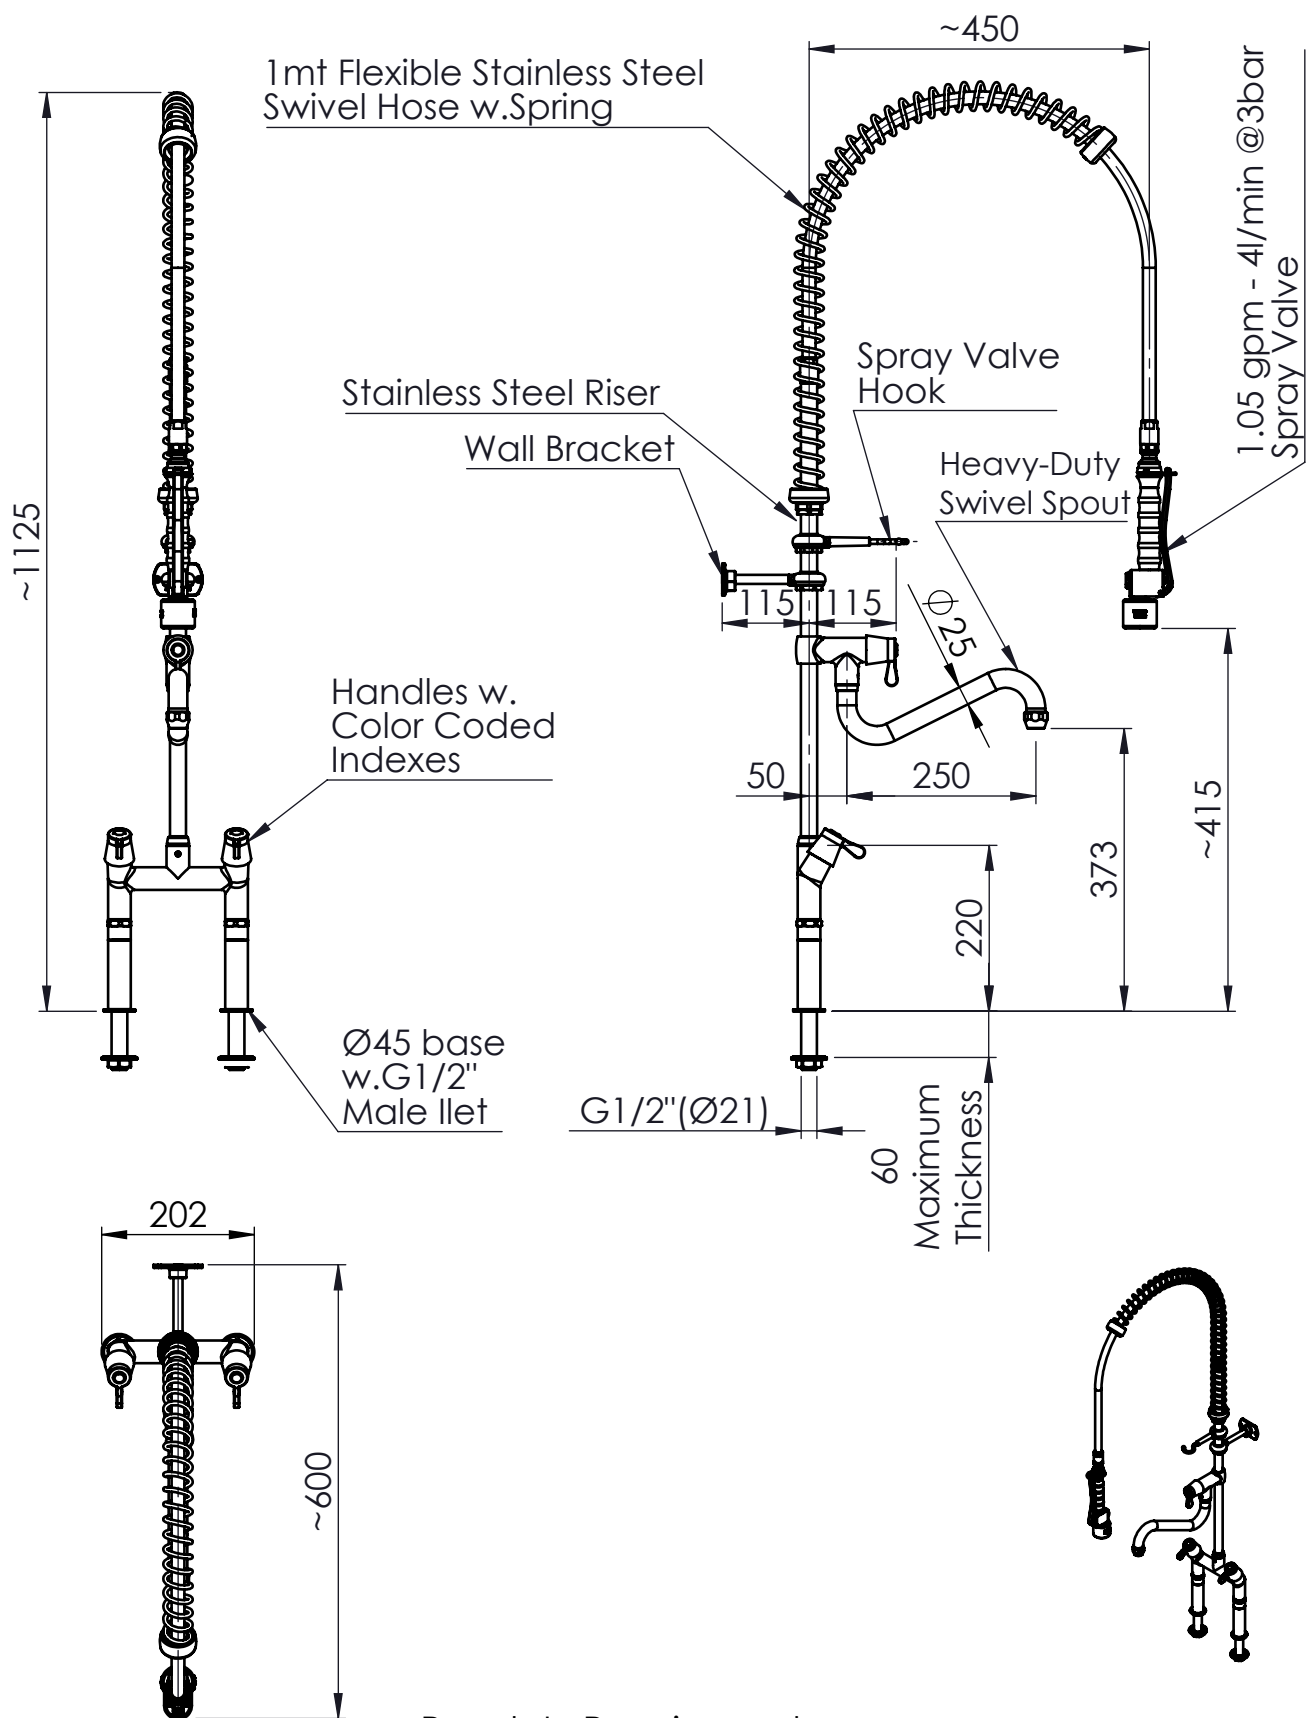

Rough-In Requirement:
23mm Mounting Hole

TITLE / DESCRIZIONE

Elevated double-hole (155mm center distance) slanted, mixing temperature, deck mount Pre-Rinse Unit with 100mm risers, riser add-on faucet with 250mm swivel nozzle (Ø 25mm). 80mm-long mounting shanks, G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube – stainless steel, brass, chrome plated. 4L/min KLARCO Low-Flow spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

SCALE /
SCALA 1:10

NUMBER / CODICE DIS.

CHD / VER

DATE /
DATA 03/03/2020

MODEL / PRODOTTO


3E.3016.4L.F9

APPR

SHEET /
PAG 1 of 2

A4V

ITEM NO.	SALES NO.	DESCRIPTION
1	P591	SPRAY VALVE "NEW Low-Flow" BLACK
2	P074	FLAT GASKET 1/2" Ø18,5x11 sp.2mm
3	P005	OVERHEAD SPRING "GREY"
4	P004	100cm Ø17 F1/2"xF1/2" FLEXIBLE HOSE
5	P007	SPRING CHROMED SUPPORT
6	P217/F9	650mm G1/2" RISER W.ADD ON TAP,HANLDE, CERAMIC HEADWORK AND O-RING
7	P034	115mm WALL BRACKETCHROMED
8	P035	SPRAY VALVE CHROMED SUPPORT
9	P236	SPOUT SCREW (short)
10	V0F0/D	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN - RH)
11	H009/color	"VOX" HANDLE W. COLOR CODED INDEX (specify the color B or R)
12	V0F9/R	COMPLETE HANDLE W.RED CODED INDEX + CERAMIC HEADWORK KIT
13	P076	O-RING 2062 (Ø15.6x1.78), EPDM 70 PEROX
14	V0F0/S	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN) LEFT
15	V0F9/B	COMPLETE HANDLE W.BLUE CODED INDEX +CERAMIC HEADWORK KIT
16	P107	FLAT GASKET 3/4" Ø24x17sp.2mm
17	P031	BACKFLOW PREVENTER DW20-DN15
18	P072	O-Ring 119 (Ø 15,08 x 2,62mm) EPDM 70
19	P592	SWIVEL SLEEVE
20	P613	#2 OR+#1 SWIVEL SLEEVE KIT FOR FAUCET/OUTLET
21	P014	STREAM REGULATOR OUTLET (Ø25 SPOUT)
22	C0S3	SWING NOZZLE Ø25x250 h.60

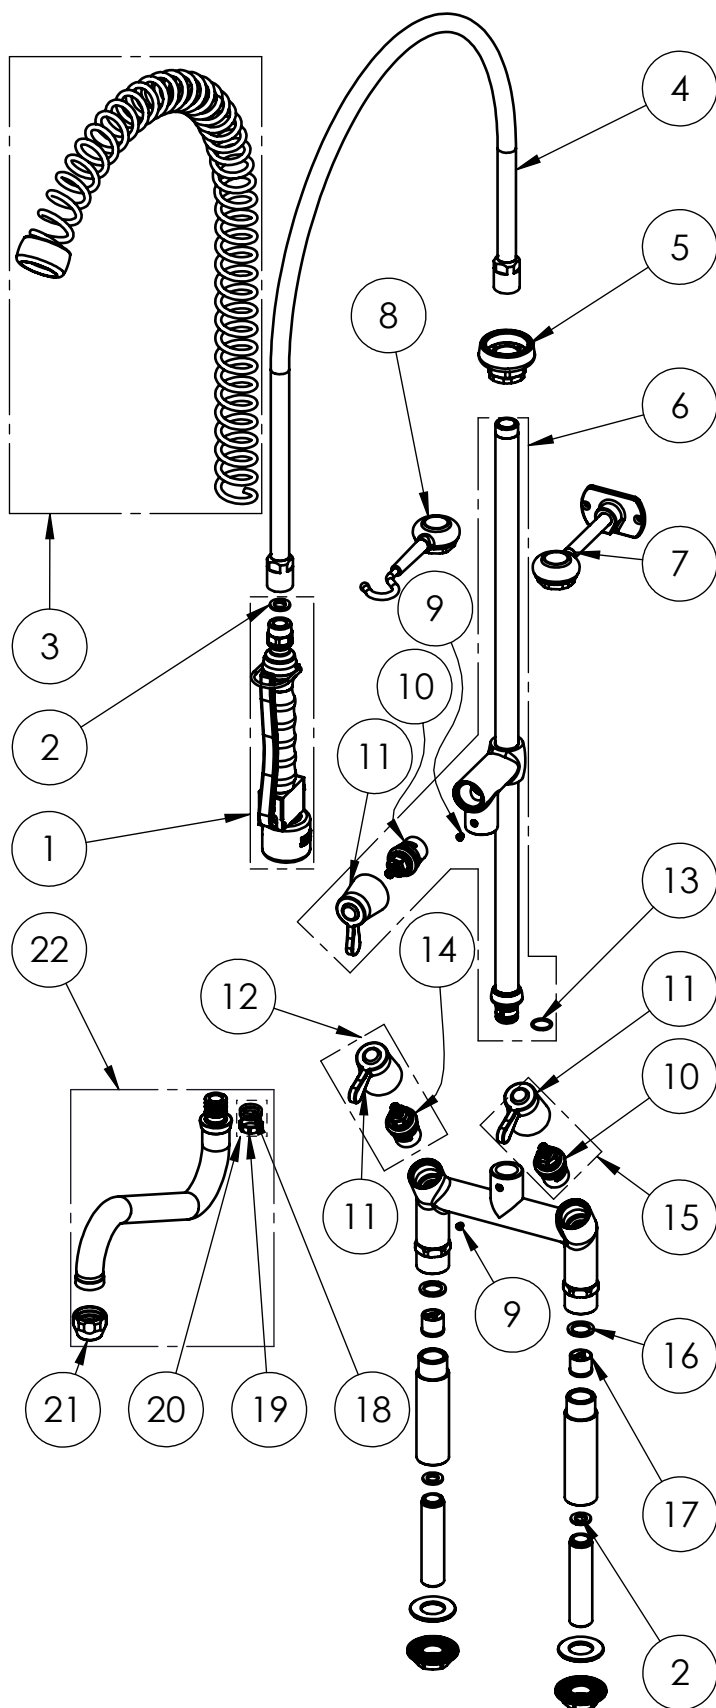

TITLE / DESCRIZIONE

Elevated double-hole (150mm center distance) slanted, mixing temperature, deck mount Pre-Rinse Unit with 100mm risers, riser add-on faucet with 250mm swivel nozzle (Ø 25mm). 80mm-long mounting shanks, G1/2" male inlets with check valves, G3/4" high flow ¼ turn ceramic headworks, riser tube – stainless steel, brass, chrome plated. 4L/min KLARCO Low-Flow spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS

SCALE /
SCALA 1:7

NUMBER / CODICE DIS.

CHD / VER

DATE /
DATA 03/03/2020

MODEL / PRODOTTO

3E.3016.4L.F9

APPR

SHEET /
PAG 2 of 2

A4V