



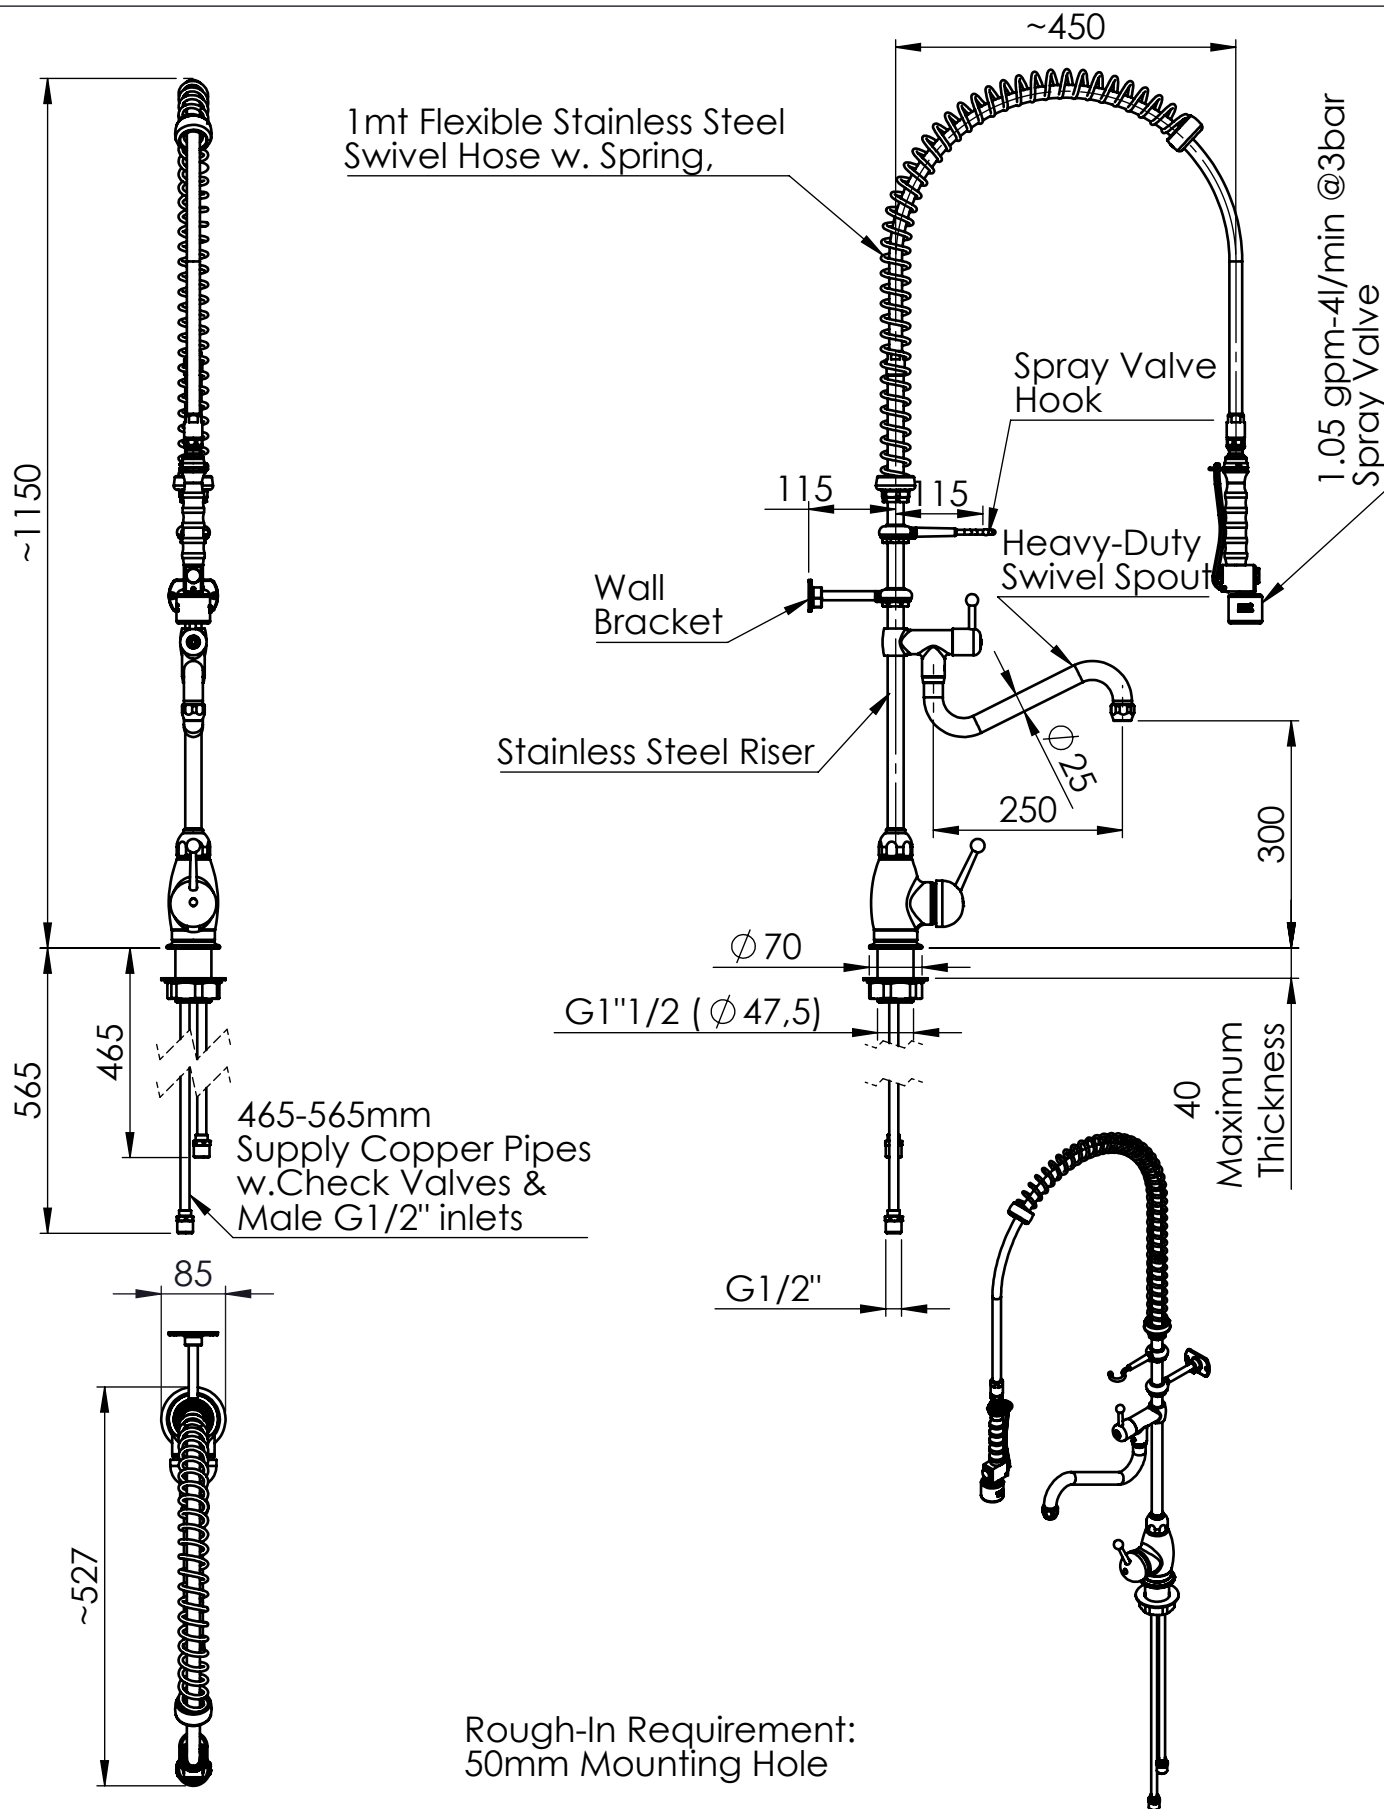

Rough-In Requirement:
50mm Mounting Hole

TITLE / DESCRIZIONE Heavy duty single hole, deck mount Pre-Rinse Unit with single lever (LCA) mixing faucet and riser add-on faucet with 250mm swivel nozzle (Ø 25mm). 80mm-long mounting shank, G1/2" male inlets with check valves, high flow ceramic cartridge and G3/4" high flow ¼ turn ceramic headwork, riser tube – stainless steel, brass, chrome plated. 4L/min KLARCO "NEW" spray valve.	DRN / DIS	CHD / VER	APPR
	SCALE / SCALA 1:10	DATE / DATA 03/03/2020	SHEET / PAG 1 of 2
This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used	Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato	NUMBER / CODICE DIS.	MODEL / PRODOTTO 3E.2940.4L.79

ITEM NO.	SALES NO.	DESCRIPTION
1	P591	SPRAY VALVE "NEW Low-Flow" BLACK
2	P074	FLAT GASKET 1/2" Ø18,5x11 sp.2mm
3	P005	OVERHEAD SPRING "GREY"
4	P004	100cm Ø17 F1/2"xF1/2" FLEXIBLE HOSE
5	P007	SPRING CHROMED SUPPORT
6	P139/F6	650mm G1/2" RISER W.ADD ON TAP,HANLDE, CERAMIC HEADWORK AND O-RING
7	P034	115mm WALL BRACKETCHROMED
8	P035	SPRAY VALVE CHROMED SUPPORT
9	V0F0/D	HIGH FLOW G3/4" CERAMIC HEADWORK (SHORT PIN - RH)
10	H029	MANIGLIA per RST - LCA
11	P236	SPOUT SCREW (short)
12	V0F6	COMPLETE LCA HANDLE +CERAMIC HEADWORK KIT
13	P391	O-RING 28x2 EPDM70
14	P286	O-RING 11x1.5mm EPDM 70 sh. PEROX
15	V070	Ø47 MIXING CARTRIDGE
16	H019	LCA SHORT LEVER
17	P592	SWIVEL SLEEVE
18	P072	O-Ring 119 (Ø 15,08 x 2,62mm) EPDM 70
19	P613	#2 OR+#1 SWIVEL SLEEVE KIT FOR FAUCET/OUTLET
20	P014	STREAM REGULATOR OUTLET (Ø25 SPOUT)
21	C0S3	SWING NOZZLE Ø25x250 h.60
22	P324	COPPER PIPE L.550mm
23	P323	COPPER PIPE L.450mm
24	P030	BACKFLOW PREVENTER DW15/DN10

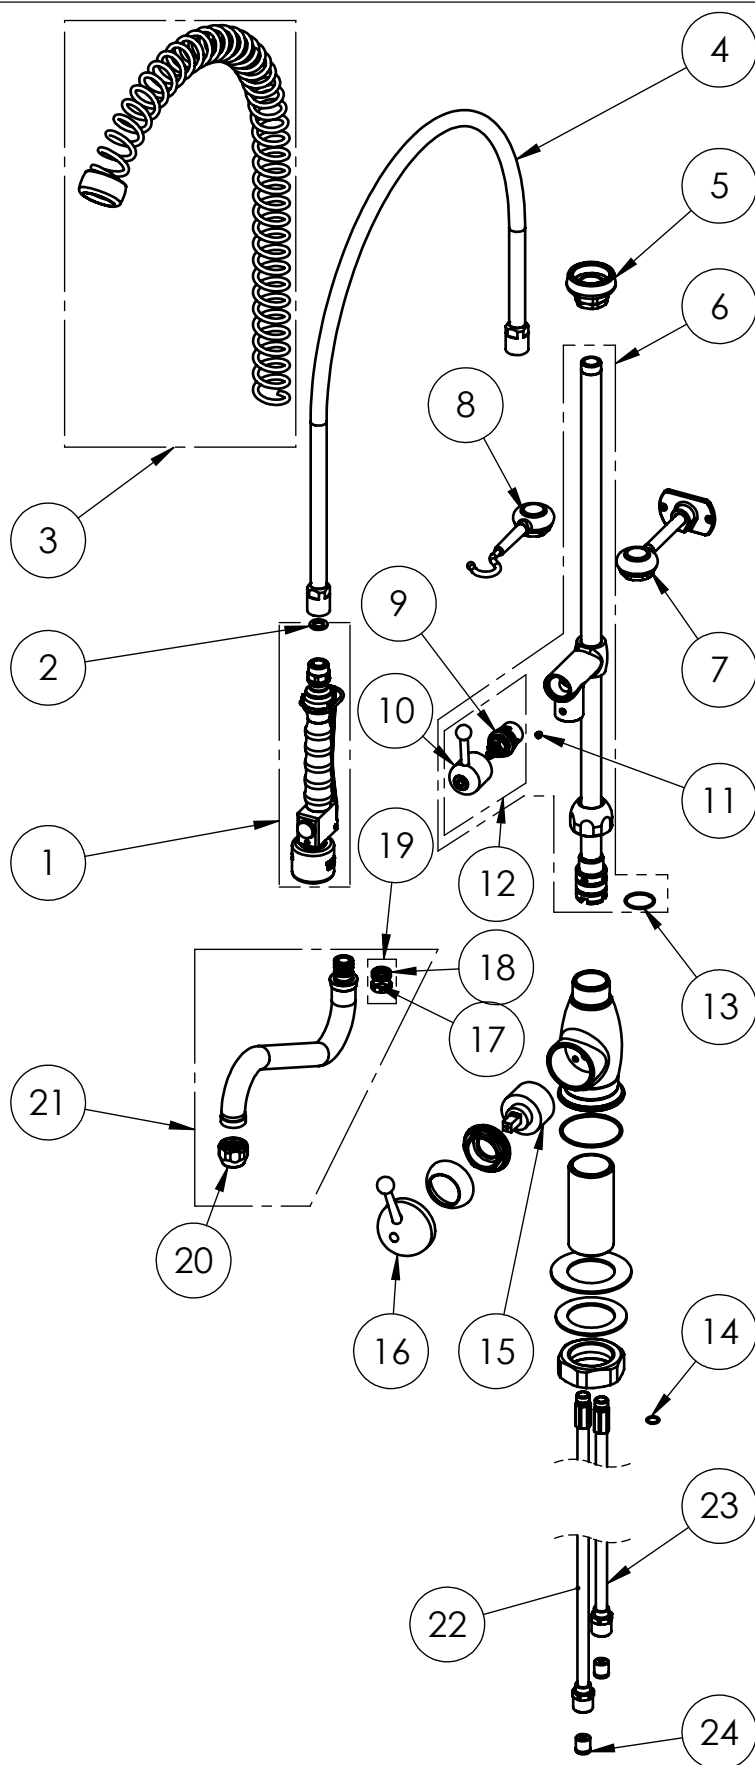

TITLE / DESCRIZIONE

Heavy duty single hole, deck mount Pre-Rinse Unit with single lever (LCA) mixing faucet and riser add-on faucet with 250mm swivel nozzle (Ø 25mm). 80mm-long mounting shank, G1/2" male inlets with check valves, high flow ceramic cartridge and G3/4" high flow ¼ turn ceramic headwork, riser tube – stainless steel, brass, chrome plated. 4L/min KLARCO "NEW" spray valve.

This drawing contains proprietary information which is the property of KLARCO S.R.L. without whose written permission it may not be copied, shown or handed to a third party or otherwise used

Questo disegno contiene informazioni di proprietà di KLARCO S.R.L. e senza la sua autorizzazione scritta non può essere copiato, mostrato o ceduto a terzi o in qualsiasi altro modo usato

DRN / DIS	CHD / VER	APPR
SCALE / SCALA 1:8	DATE / DATA 03/03/2020	SHEET / PAG 2 of 2
NUMBER / CODICE DIS.	MODEL / PRODOTTO 3E.2940.4L.79	